

Rec'd PCT/PTO 30 DEC 2005

10/535067

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
27 May 2004 (27.05.2004)

PCT

(10) International Publication Number
WO 2004/044425 A1

(51) International Patent Classification⁷: **F04B 43/12**

(74) Agents: DABRINGHAUS, Walter et al.; Rosa-Luxemburg-Strasse 18, 44141 Dortmund (DE).

(21) International Application Number:
PCT/EP2003/012214

(22) International Filing Date:
3 November 2003 (03.11.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
202 17 483.2 13 November 2002 (13.11.2002) DE

(71) Applicant (for all designated States except US): ECO-LAB INC. [US/US]; 370 Wabasha Street N., St. Paul, MN 55102-1390 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): HUBER, Wolfgang [DE/DE]; Johannes-Weibhauser-Strasse 16, 83413 Friedolfing (DE). RUTZ, Klaus [DE/DE]; Siegsdorferstrasse 15, 83377 Vachendorf (DE). HEIDUCZEK, Ralf [DE/DE]; Klausweg 2a, 83483 Bischofswiesen (DE).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (*regional*): ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declaration under Rule 4.17:

— of inventorship (Rule 4.17(iv)) for US only

[Continued on next page]

(54) Title: PERISTALTIC PUMP

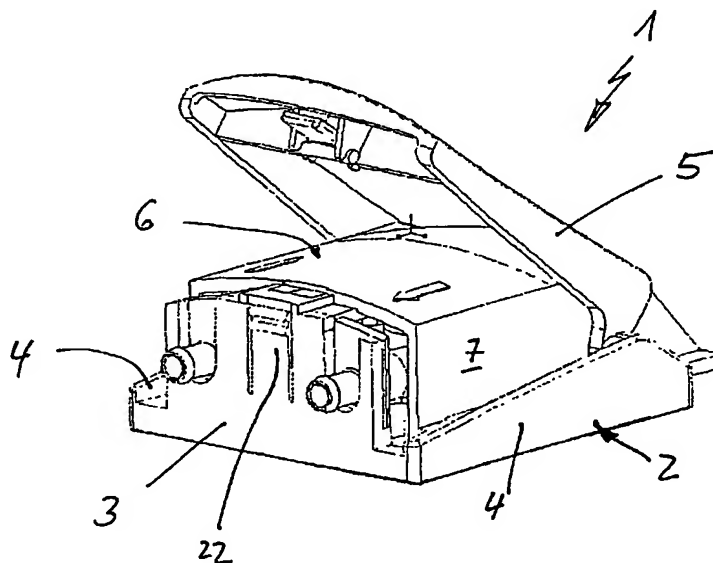

(57) Abstract: A peristaltic pump (1) with a rotating squeeze roller carrier (12), a squeeze hose (14) partly looping around the squeeze rollers (13) and a curved contact wall (19) for the squeeze hose (14), the contact wall (19) being opposite to the effective surface of the squeeze rollers, whereby the contact wall (19) is movable by way of a setting lever (5) from a setting (Fig. 5), which enables fitting with the squeeze hose (14), to a work setting (Fig. 6), pressing the squeeze hose (14) against the squeeze rollers (13) and whereby the contact wall (19) forms a part of a pump housing cover (6) at which the setting lever (5) is positioned to be outwardly pivotable for displacement of the cover (6).

WO 2004/044425 A1



Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

"Peristaltic pump"

The invention relates to a peristaltic pump, in particular for use in dishwashers for the metering of a liquid or pasty cleaning agent, with a rotating squeeze roller carrier, a squeeze hose partly looping round the squeeze rollers and a curved contact wall, which is disposed opposite the effective surface of the squeeze rollers, for the squeeze hose.

In one metering pump used by the applicant the squeeze hose is laid in a block-shaped pump body, which has a substantially semicircular edge wall, around spring-mounted squeeze rollers on a squeeze roller carrier, wherein after assembly a cover is screw-connected over this configuration, one of the counter-bearings of the squeeze roller carrier being provided in the cover. In that case it is also known to provide the squeeze hose bend, which is positioned in the pump, with coupling and detent heads which are fixed in the region of the housing outer wall in order to then connect the hoses with, for example, the dishwasher.

In the case of another solution employed by the applicant (e.g. DE 39 43 430 A1) the squeeze hose bend is accommodated in a plastics material yoke which forms the curved contact wall for the squeeze hose in the use position,

- 2 -

wherein the curved wall is detented with a squeeze hose, which is detented in place, after being laid around the squeeze hose rollers at the pump body. The fastening of the squeeze wall in a plane, perpendicular to the squeeze roller axis, is also shown in DE-26 57 908-B2 or DD-157 620, whereas US-4,256,442 shows the fastening of the wall through a parallel leverage with a pivot handle.

It has proved that the known designs of peristaltic pumps are still comparatively costly, wherein in the case of the first solution the exchange, which is necessary from time to time, of the squeeze hose bend is possible only by screwing on the cover, whereas in the case of the solution provided with the pivot cover a disadvantage arises, in particular, in the susceptibility of the cover to breakage and thus loss of the functional capability of the pump.

Peristaltic pumps of other construction are known from DE 33 26 766-A1 or DE-696 16 336 T2 or from DE-GM 71 47 400, to give only a few examples.

The object of the invention is to create a solution by which a simple exchange of the squeeze hose bend is made possible, without loosening any screws, and with a robust construction of all elements.

- 3 -

According to the invention this object is met with a peristaltic pump according to claim 1.

Because of the design of the contact wall movable by way of a pivot lever an extremely simple squeeze hose positioning is possible. The pivot lever is opened, wherein the contact wall is removed from the hose, the hose can be removed or exchanged, the pivot lever is closed and the contact wall and all other pump elements are disposed in the working position. At the same time it is achieved by this design that on closing the pump housing cover the contact wall, which is integrally formed therewith, is simultaneously displaced into the working position.

Embodiments of the invention are evident from the sub-claims.

According to the invention the squeeze roller carrier together with the squeeze rollers is positioned at a housing base, wherein support detents for receiving pivot cams of the setting lever are provided at the housing base. In that case it can be advantageous in a further embodiment if guides for receiving slide rails at the housing cover are provided at the housing base.

It can be advantageous if an end wall with a detent tongue

- 4 -

as well as with two substantially U-shaped recesses for passage of the squeeze hose is provided at the housing base, wherein in a further embodiment it can be provided that the setting lever is constructed as a yoke with counter-detent for detenting at the detent tongue in the housing closed setting. In that case it is possible to provide with the same detent element a carrier not only for the squeeze hose bend, but also for the setting lever or setting yoke.

The squeeze hose can be provided at a hose carrier or, however, can be positioned as an individual element in corresponding detent recesses in the housing end wall, which is equally proposed by the invention.

Further advantages, details and features of the invention are evident from the following description as well as on the basis of the drawing, in which:

Figs. 1 to 4 show, in perspective illustration, different positions of the pump head of the peristaltic pump from the unlocked setting up to the squeeze hose withdrawal setting and

Fig. 5 and 6 show a cross-section through the housing of the pump head in unlocked and locking

setting.

Of the peristaltic pump according to the invention, there is illustrated in the figures the pump head; the corresponding drives are not further depicted here.

The pump head denoted generally by 1 comprises a base element 2 with an integrally formed end wall 3 and two side walls 4 which are in turn integrally formed therewith, as well as a housing cover 6 which is displaceable by way of a pivot lever 5, and which in turn has integrally formed side wall surfaces 7 parallel to the side wall surfaces 4 of the base part. The side wall surfaces 7 of the housing cover have, at the lower outer edge thereof, integrally formed slide rails 8 which are displaceably guided in corresponding counter rails or grooves in the region of transition from the base of the side wall surfaces 4.

As evident particularly from Fig. 2, the pivot yoke 5 is pivotably mounted at the cover 6 by way of inwardly pointing hinge pins 9, wherein outwardly pointing pins 10 can bear against pivot projections 11 which are integrally formed at the side walls 4 of the base part to pivot inwardly.

A rotor 12 (Fig. 4) with three squeeze rollers 13, which

- 6 -

can be brought into rotation by a drive which is not illustrated in more detail, is detented in the base element 2. As illustrated in Fig. 3 and 4, a squeeze hose bend 14 is fixed by the coupling projections 15 in a squeeze hose carrier 16, which can be detented with or released from the front side 3 by way of sliding guides, wherein the connections 15 project outwardly beyond the entire housing.

At this point it is to be noted that the squeeze hose bend 14 is fixable also as an individual element by way of alternatively provided slots 17 in the carrier plate 16 or directly in the slots 18 in the end wall 3, depending on the respective construction. The cover 6 has, in the interior, the contact wall 19 for the squeeze hose 14, wherein this contact wall 19 presses the squeeze hose 14 against the squeeze roller 13 by way of pivotation in accordance with arrow 20 in Fig. 5, as is evident from Fig. 6, which shows the pump head in closed setting, i.e. the cover 6 is displaced in accordance with arrow 21 from the position illustrated in Fig. 5 to the closed position illustrated in Fig. 6.

The end wall 3 is beyond that furnished with a detent element 22 which co-operates with a detent counter-element 23 at the pivot yoke 5 and detents all elements together in the closed setting.

- 7 -

It can be seen that an exchange of the squeeze hose bend 14 subjected to wear is extremely simple:



From the closed setting illustrated in Fig. 6, the pivot lever 5 is pivoted upwardly, whereby solely through the resilience of the squeeze hose 14, which bears against the contact wall 19, the cover 6 is displaced to the right in the figures, at least into the slightly open position illustrated in Fig. 1. If the pivot lever is now pivoted somewhat further and releases the contact cam 11, the cover can be withdrawn from the housing base 3 by way of the slide rails 8, this position being illustrated in Fig. 3, wherein at the same time the squeeze hose bend 14 is freed so that the squeeze hose carrier 16 together with the squeeze hose 14 can be withdrawn upwardly, as is depicted in Fig. 4. After placing a new squeeze hose bend 14 around the squeeze rollers 13, there takes place a pushing together of the elements and finally locking in the working position illustrated in Fig. 6.

Claims:

1. Peristaltic pump (1) with a rotating squeeze roller carrier (12), a squeeze hose (14) partly looping around the squeeze rollers (13) and a curved contact wall (19) for the squeeze hose (14), the contact wall (19) being opposite to the effective surface of the squeeze rollers, whereby the contact wall (19) is movable by way of a setting lever (5) from a setting (Fig. 5), which enables fitting with the squeeze hose (14), to a work setting (Fig. 6), pressing the squeeze hose (14) against the squeeze rollers (13) and whereby the contact wall (19) forms a part of a pump housing cover (6) on which the setting lever (5) is positioned to be outwardly pivotable for displacement of the cover (6).
2. Peristaltic pump according to claim 1, characterised in that the squeeze roller carrier (12) together with the squeeze rollers (13) is positioned on a housing base (2), wherein support detents (11) for receiving pivot cams (10) of the setting lever (5) are provided on the housing base.
3. Peristaltic pump according to claim 1 or 2, characterised in that guides for receiving slide rails (8) on the housing cover

(6) are provided on the housing base (2).

4. Peristaltic pump according to one of the preceding claims,
characterised in that
an end wall (3) with a detent tongue (22) and with two substantially U-shaped recesses (18) for passage of the squeeze hose (14,15) is provided on the housing base (2).
5. Peristaltic pump according to one of the preceding claims,
characterised in that
the setting lever (5) is constructed as a yoke with a counter detent (23) for detenting on the detent tongue (22) in the housing closed setting (Fig. 6).
6. Peristaltic pump according to one of the preceding claims,
characterised in that
the squeeze hose (14) is provided on a hose carrier (16) which in the open setting of the housing is positionable at the housing end wall (3).

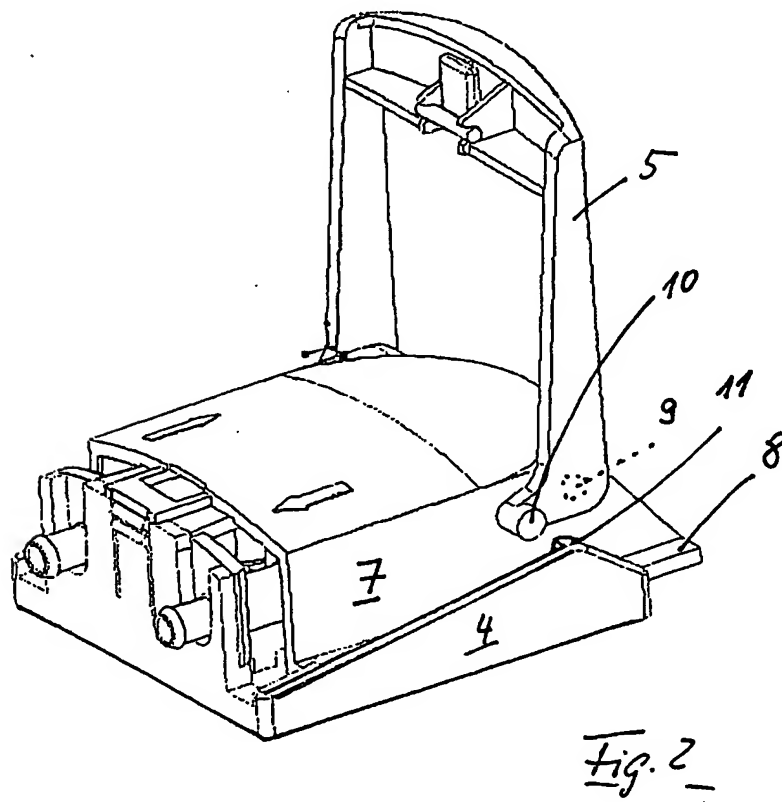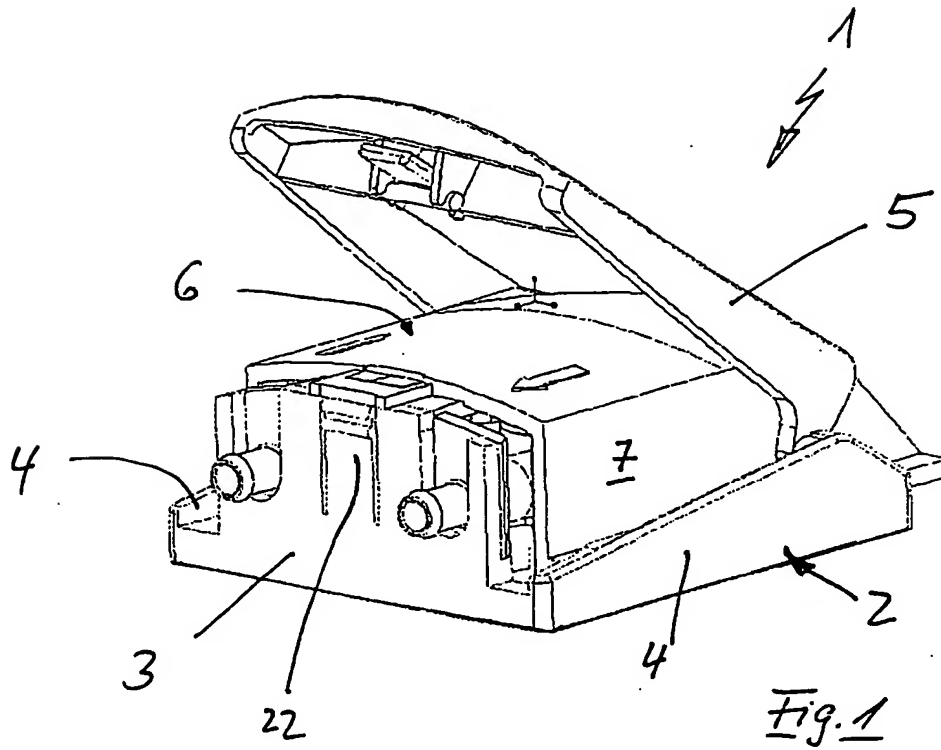

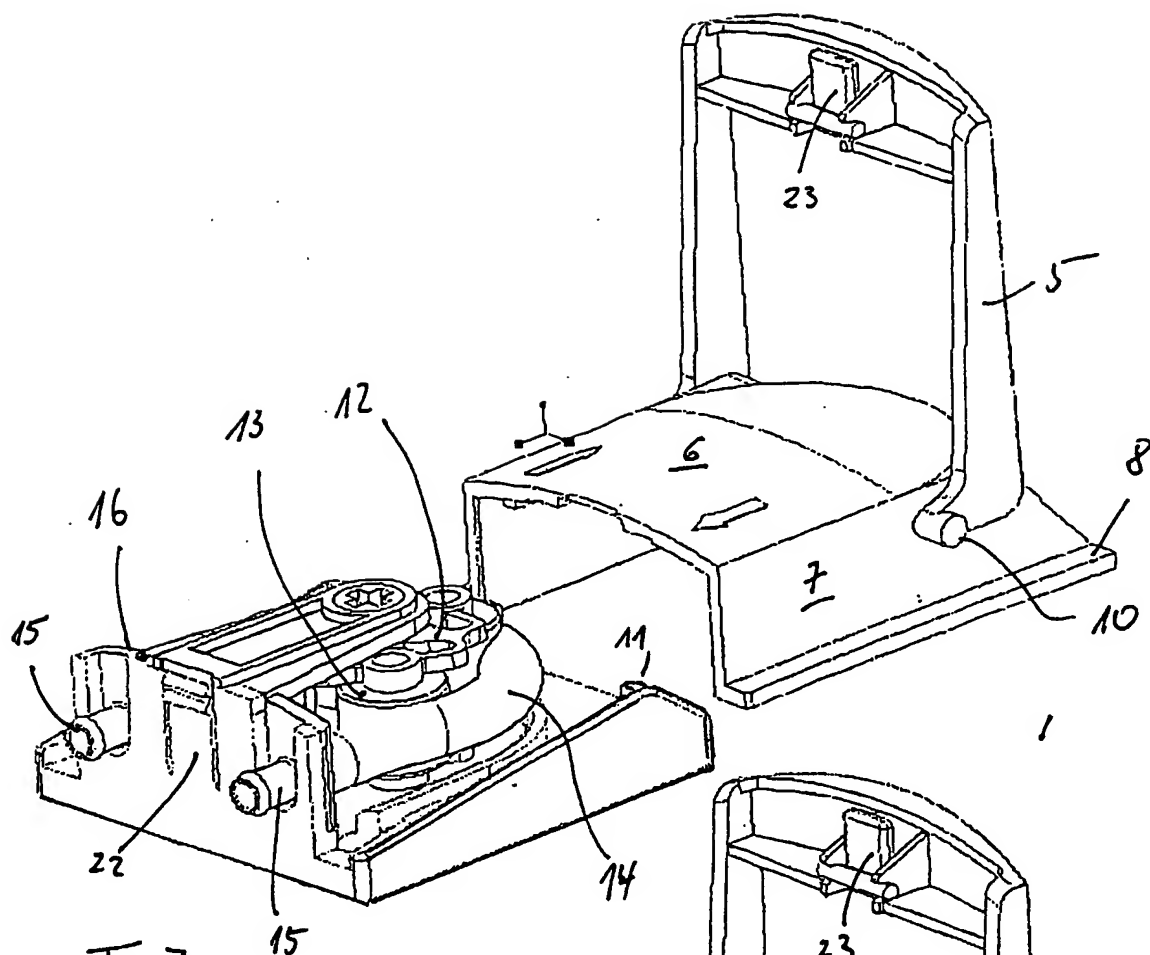


Fig. 3



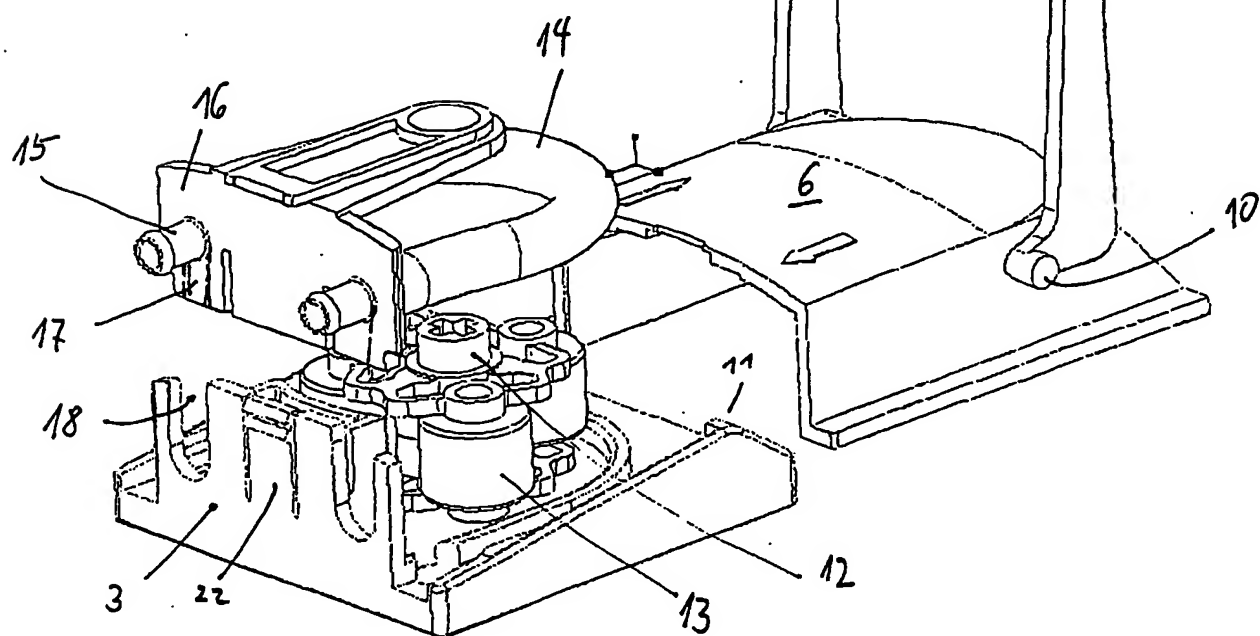


Fig. 4

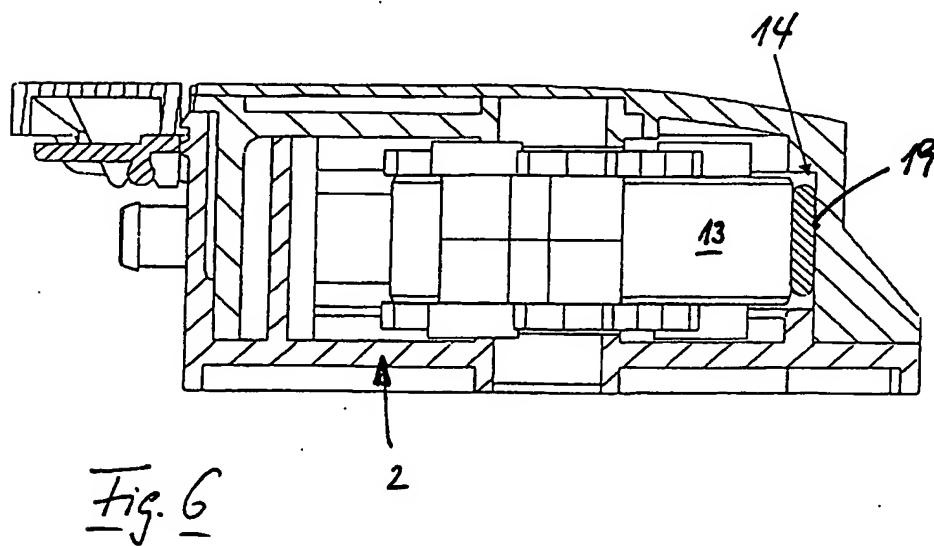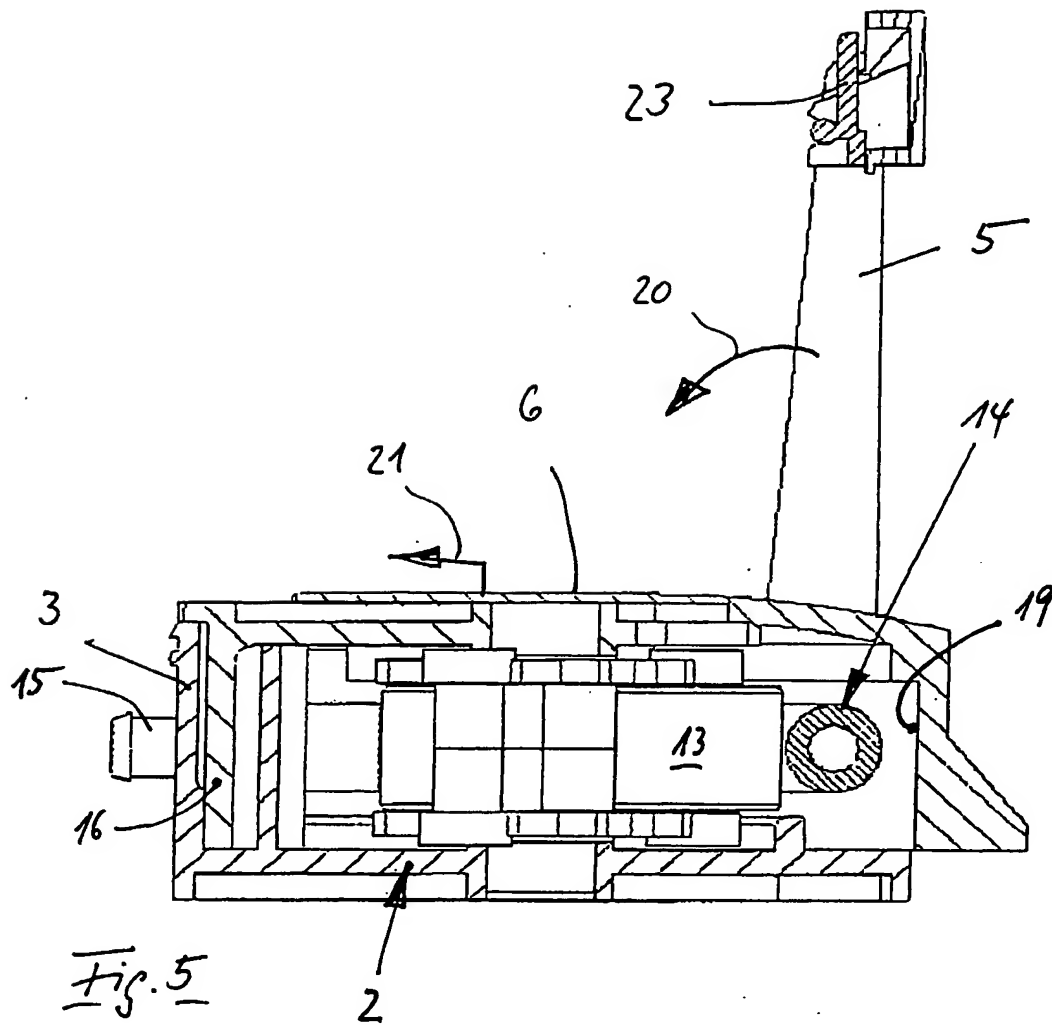

INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP 03/12214

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 F04B43/12

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 F04B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the International search (name of data base and, where practical, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 4 256 442 A (LAMADRID RENE G ET AL) 17 March 1981 (1981-03-17) column 2, line 26 -column 3, line 39	1-6
A	EP 0 786 596 A (IFREMER) 30 July 1997 (1997-07-30) abstract	1
A	GB 727 001 A (EVAN JOHN BAX) 23 March 1955 (1955-03-23) claim 1; figures 1-3	1

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *G* document member of the same patent family

Date of the actual completion of the International search

3 March 2004

Date of mailing of the International search report

11/03/2004

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Fistas, N

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/EP 03/12214

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 4256442	A	17-03-1981	NONE	
EP 0786596	A	30-07-1997	FR 2744176 A1	01-08-1997
			DE 69700070 D1	04-02-1999
			DE 69700070 T2	20-05-1999
			DK 786596 T3	23-08-1999
			EP 0786596 A1	30-07-1997
GB 727001	A	23-03-1955	NONE	